



NFC-61STT

Flangeless STT (Stereo Tweeter Technology) In Ceiling Speaker

The goal was to create the finest architectural speakers available. How is such a lofty goal achieved? It starts with a management team that has been designing products for the architectural audio market for over 20 years. One of those products resides in our industry's Hall of Fame. The team's experience and engineering expertise is then combined with passion to create speakers that stand apart from the ordinary. To us, great speakers create great music.

Our team is genuinely excited about music and still gets a thrill when we listen to our favorite music perfected on one of our newest creations. Of course each of our speakers is backed by our **LIFETIME WARRANTY**.

KEY FEATURES

- Design Eliminates Phase Cancellation
- DVC 6 ½" Polypropylene Trueform™ Woofer
- 1" STT Soft Dome Pivoting Tweeter
- Smooth Visual Flangeless System
- PRX™ Poly Resin CrossPoint Molds
- PRX™ Dog legs
- Never Rust™ Grills firmly attached with Neodymium Magnets
- **LIFETIME WARRANTY**



The DaVinci Group
1299 Columbia Ave. Unit E5
Riverside, California 92507


Phone: 888-TDG-6321
Local: 951-808-3721
Fax: 951-808-3758

www.tdgaudio.com

NFC-61STT

ACOUSTIC SPECIFICATIONS


- DVC 6 ½" Polypropylene Woofer
- 1" STT Soft Dome Pivoting Tweeter
- +/- 3db Tweeter & Bass Settings
- 5/90 WPC Power handling
- 88db SPL
- Frequency Response 48Hz – 20kHz

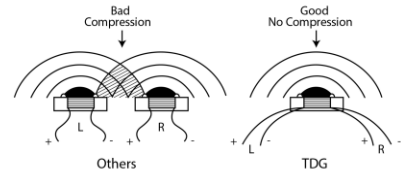


MECHANICAL SPECIFICATIONS

- Total Diameter with Grill: 9 11/16" (246mm)
- Mounting Depth: 4" (100mm)
- Cut Out Dimensions: 8 ¼" (210mm)
- Pre-Construction: Use Vanguard PCB-6 or MSE-6

FRONT



MOUNTING DEPTH/
MINIMUM CUTOUT



GRILLE

